



(43) International Publication Date
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number
WO 2004/044348 A1

(51) International Patent Classification⁷: **E04F 15/22**

(74) Agent: AWAPATENT AB; P.O. Box 5117, S-200 71 Malmö (SE).

(21) International Application Number:
PCT/SE2003/001690

(22) International Filing Date:
3 November 2003 (03.11.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0203339-7 13 November 2002 (13.11.2002) SE
60/425,741 13 November 2002 (13.11.2002) US

(71) Applicant (for all designated States except US): AB GUSTAF KÄHR [SE/SE]; P.O. Box 805, S-382 28 Nybro (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BRÄNNSTRÖM, Hans [SE/SE]; Pukebergarnas väg 9, S-382 34 Nybro (SE). TROST, Wolfgang [SE/SE]; Tallvägen 12, S-382 37 Nybro (SE). ISRAELSSON, Leif [SE/SE]; Jöddegatan 6 B, S-382 37 Nybro (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ.

[Continued on next page]

(54) Title: FLOORBOARD AND FLOOR COVERING FOR RESILIENT FLOOR

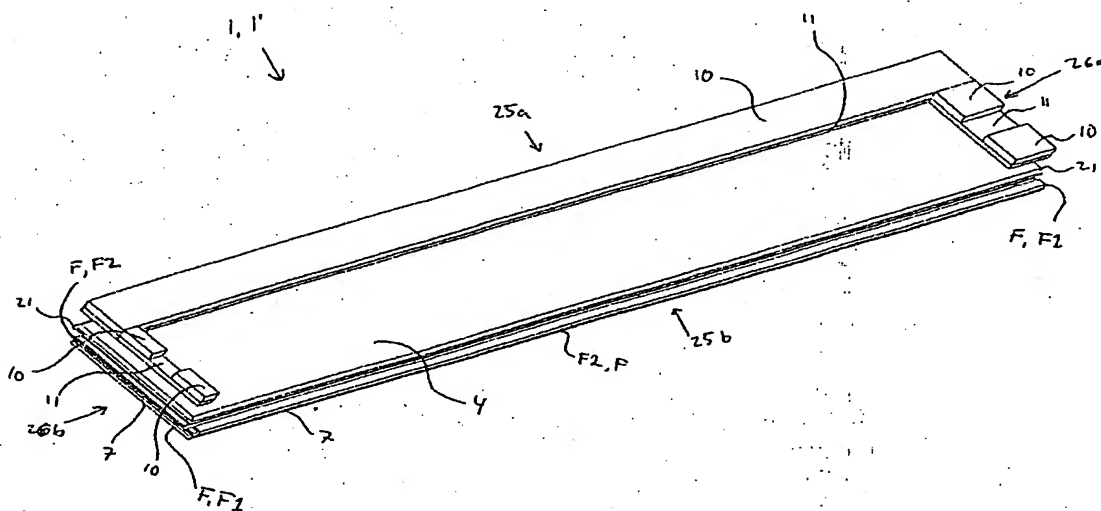

(57) Abstract: A floorboard for making a resilient floor by joining to at least one neighbouring, substantially identical floorboard (1'), so that joined upper neighbouring parts (7, 7') of the edge portions of the floorboards (1, 1') together define a joint plane (F), perpendicular to the main plane (P) of the joined floorboards, comprises a resilient base (10) which is arranged on the underside of the floorboard (1, 1') and which extends beyond said joint plane (F), supporting layer (11) which is arranged between the underside of the floorboard (1) and the resilient base (10), and a locking system, which is arranged along at least two parallel edges (25a, 25b; 26a, 26b) of the floorboard (1) and integrated with the floorboard, for mechanical joining, vertically (D1) and horizontally (D2), of the floorboard (1) to the neighbouring, substantially identical floorboard (1'). Furthermore, a kit of parts and a method for installation of resilient floors as well as a method for manufacturing resilient floors are disclosed.